

AXXAIR

www.axxair.com

V3.5-11-2014

TUBE TO TUBESHEET

TUBE SHEET RANGE



MADE IN FRANCE


GLOBAL PROCESS

www.axxair.com

ø0,4" - ø3"
ø10 - ø80 mm



V3.5-11-2014




Technical characteristics

- Rotating joint for gas, current and cooling
- **Water-cooled** tilt head
- Carriage for head and wire adjustment
- Integrated rotating wire feeder (Ø 0.8 mm)
- Wire feed speed from 0 to 1.5 m/min
- Power factor: **200 A, 100%**

Weight:

- 7.5 kg without wire spool
- 8.5 kg without wire spool

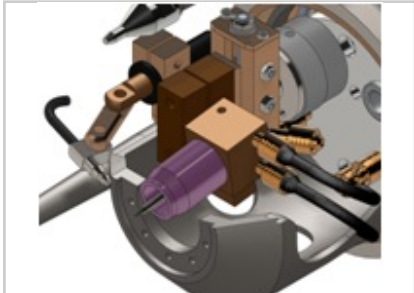

Water-cooled tilt head with adjustable wire



Wire supply rotates along with head



Driven by AXXAIR power source (cf compatibility table)

References	Options	Consummables
SATP-80	Additional gas chamber Pneumatic clamping	SCE16-50 : Ø 1,6 mm SCE24-50 : Ø 2,4 mm

